

# ATLANTIC SERIES

## IP40 COMPACT STEEL SURFACE DISTRIBUTION CABINETS

Description: IP40 DISTRIBUTION CABINETS TRANSP. DOOR (72-96 MOD.)

Reference:

**40SUP72-96PT**

### Characteristics:

<b>Product type:</b>	Compact steel surface distribution cabinets, with removable chassis
<b>Dimensions cabinet:</b>	(AxBxC) 710x670x212 mm
<b>Installation:</b>	Surface
<b>Type of door:</b>	Transparent door
<b>Locking:</b>	5-mm ¼ turn double-bit lock
<b>Finish:</b>	Coated with hardened epoxy-polyester paint, textured
<b>Colour:</b>	RAL 9003
<b>Mounting plate:</b>	Without mounting plate
<b>Weight (kg):</b>	20,4
<b>Materials:</b>	Cold-rolled steel EN 10130+A1 and galvanised steel chassis
<b>Thickness:</b>	Enclosure: 1,2 mm. Glass door: 4 mm
<b>Sealing gasket:</b>	Injected polyurethane sealing gasket
<b>Door material:</b>	Tempered and tinted transparent glass
<b>Capacity:</b>	72 modules (3 mod. lids 200 mm + 1 blind lid 50 mm). 96 modules (4 mod. lids 150 mm + 1 blind lid 50 mm)
<b>Max. cabinet load:</b>	
<b>Max. mounting plate load:</b>	
<b>Max. door load:</b>	

### Technical data:

<b>Degree of protection:</b>	IP40
<b>NEMA degree of protection:</b>	
<b>Resistance to impact:</b>	IK09
<b>Ambient temperature range:</b>	-25 °C / +40 °C
<b>Maximum operating voltage:</b>	1000 V AC / 1500 V DC

### Certificates and standards:

<b>Directive:</b>	2014/35/EU
<b>Standards:</b>	IEC 62208, IEC 61439-1
<b>Certificates:</b>	



### Codes:


<b>EAN:</b>	8431044283135
<b>Customs tariff number:</b>	85.38.10.00
<b>ETIM 8.0:</b>	EC000058

# ATLANTIC SERIES

## IP40 COMPACT STEEL SURFACE DISTRIBUTION CABINETS

Description: IP40 DISTRIBUTION CABINETS TRANSP. DOOR (72-96 MOD.)

Reference: 40SUP72-96PT

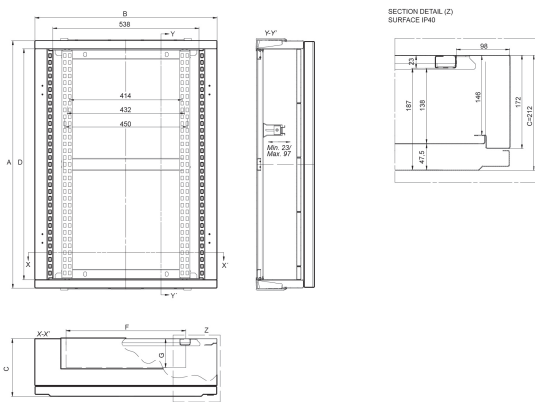

Standard drawing



**Detailed drawing:** <http://www.ide.es/downloads/planos/pdf/40SUP72-96PT.pdf>  
<http://www.ide.es/downloads/planos/dxf/40SUP72-96PT.dxf>  
<http://www.ide.es/downloads/planos/stp/40SUP72-96PT.stp>

<b>Cable entry:</b>	(FxG) 440x106 mm	<b>Body to be flush-fitted:</b>	-
<b>Wall fixing:</b>	-	<b>Wall fixing material:</b>	
<b>Inside usable space:</b>	(D) 650 mm	<b>Glass door with transparent panel:</b>	(HeightxWidth) 570x440 mm
<b>No. Hinges:</b>		<b>Door profiles:</b>	

### Sustainability:

RoHS - REACH

### Supply:

They are supplied assembled in individual packaging that contains the cabinet with the door and the locks assembled, and an accessory bag. Cabinets are supplied empty, without lids or DIN rail

### Product end of life:

It does not require specific recycling operations.

### Recommended applications:

Tertiary and residential sectors. for use indoors, bars and restaurants, department stores, schools, offices, etc.